

# Vorläufiges Datenblatt epro<sup>®</sup>-DM.S Gehörschutz

(Stand: 04.03.2025)




Dämmwerte:

	SNR <sub>84</sub> [dB]	H <sub>84</sub> [dB]	M <sub>84</sub> [dB]	L <sub>84</sub> [dB]
<b>Result (m<sub>r</sub>-s<sub>i</sub>)</b>	<b>15</b>	<b>15</b>	<b>11</b>	<b>12</b>
m <sub>r</sub>	16.1	17.1	13.2	13.2
s <sub>f</sub>	1.6	1.7	2.1	1.7
Limit		12	11	9

epro-DM.S 15

	SNR <sub>84</sub> [dB]	H <sub>84</sub> [dB]	M <sub>84</sub> [dB]	L <sub>84</sub> [dB]
<b>Result (m<sub>r</sub>-s<sub>i</sub>)</b>	<b>23</b>	<b>22</b>	<b>21</b>	<b>20</b>
m <sub>r</sub>	24.5	24.2	22.9	22.5
s <sub>f</sub>	1.5	1.9	2.3	2.8
Limit		12	11	9

epro-DM.S 25

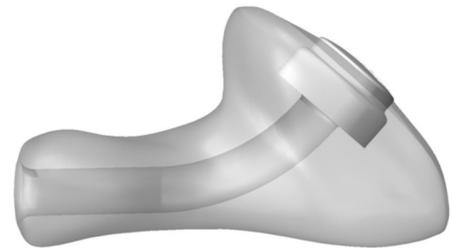

	SNR <sub>84</sub> [dB]	H <sub>84</sub> [dB]	M <sub>84</sub> [dB]	L <sub>84</sub> [dB]
<b>Result (m<sub>r</sub>-s<sub>i</sub>)</b>	<b>23</b>	<b>27</b>	<b>20</b>	<b>18</b>
m <sub>r</sub>	28.8	30.8	25.7	24.4
s <sub>f</sub>	5.5	4.1	6.1	6.4
Limit		12	11	9

epro-DM.S SWITCH  
closed (max.)



	SNR <sub>84</sub> [dB]	H <sub>84</sub> [dB]	M <sub>84</sub> [dB]	L <sub>84</sub> [dB]
<b>Result (m<sub>r</sub>-s<sub>i</sub>)</b>	<b>12</b>	<b>15</b>	<b>9</b>	<b>8</b>
m <sub>r</sub>	14.9	17.2	11.9	10.4
s <sub>f</sub>	2.5	2.5	2.8	2.9
Limit		12	11	9

epro-DM.S SWITCH  
open (min.)

